

TOMCO Pneumatic SINGLE SHUT-OFF

1/4" BASIC SIZE

Working Range:
Maximum Operating Pressure;
To 150 psig
Temperature: -40° to +225° F
Pressure Drop:


Inlet	5 psig	10 psig
100 psig	25 scfm	34 scfm

FEMALE THREAD	Catalog No.
1/4" NPSF	UC2-16

MALE THREAD	Catalog No.
1/4" NPT	UC2-15
3/8" NPTF	UC2-20

UNIVERSAL SERIES

ARO, TRU-FLATE, INDUSTRIAL INTERCHANGE

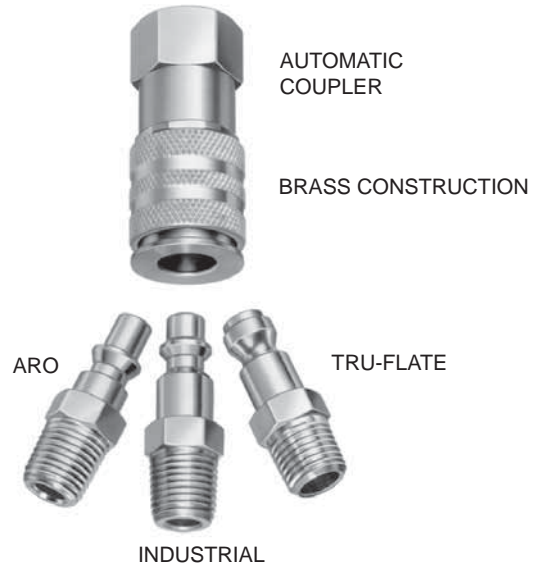

TOMCO Pneumatic SINGLE SHUT-OFF OR STRAIGHT THROUGH

1/8" BASIC SIZE

Working Range:
Maximum Operating Pressure;
To 250 psig
Temperature: -40° to +225° F
Pressure Drop:

Inlet	5 psig	10 psig
100 psig	16 scfm	23 scfm

SERIES SC

RECTUS SERIES 21 INTERCHANGE

MAX ACROSS FLATS ONLY 5/8"



FEMALE THREAD	Catalog No.	Catalog No.
1/8" NPTF 1/4" NPTF	<u>STEEL</u>	BRASS (valved)
	SCP-11	SCC-11B
	SCP-16	BRASS (Straight Through) SCC-11BLV SCC-16BLV

MALE THREAD	Catalog No.	Catalog No.
1/8" NPTF 1/4" NPTF	<u>STEEL</u>	BRASS (valved)
	SCP-10	SCC-10B
	SCP-15	BRASS (Straight Through) SCC-10BLV SCC-15BLV